


CONVEYORS

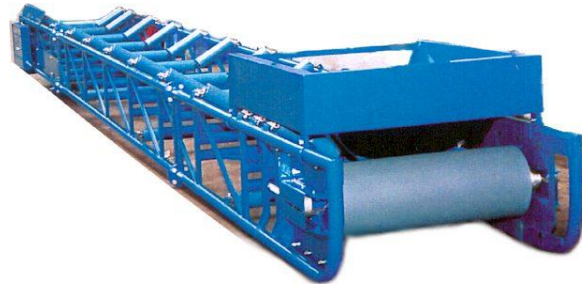

Construction-height (mm) / Pipe-Ø (mm) / Driving-drum-Ø (mm)	Belt-width (mm)	AA (m)	Drive (KW)
550 / 60 / 320	500	10	4
550 / 60 / 320	500	15	4
550 / 60 / 320	500	20	4
550 / 60 / 320	500	25	5,5
550 / 60 / 320	500	30	7,5
550 / 60 / 320	650	10	4
550 / 60 / 320	650	15	4
550 / 60 / 320	650	20	5,5
550 / 60 / 320	650	25	7,5
550 / 60 / 320	650	30	11
550 / 60 / 320	800	10	5,5
550 / 60 / 320	800	15	7,5
550 / 60 / 320	800	20	11
550 / 60 / 320	800	25	15
550 / 60 / 320	800	30	15
650 / 60 / 420	1.000	10	7,5
650 / 60 / 420	1.000	15	11
650 / 60 / 420	1.000	20	15
650 / 60 / 420	1.000	25	22
650 / 60 / 420	1.000	30	30
720 / 70 / 520	1.200	10	11
720 / 70 / 520	1.200	15	15
720 / 70 / 520	1.200	20	22
720 / 70 / 520	1.200	25	30
720 / 70 / 520	1.200	30	37
900 / 90 / 520	1.400	10	15
900 / 90 / 520	1.400	15	22
900 / 90 / 520	1.400	20	30
900 / 90 / 520	1.400	25	37
900 / 90 / 520	1.400	30	45

Standard-conveyors with V-feet

Optional: Conveyors on wheels, hydr. lifting, galvanized (Zn), gangway, side-liners etc.

>>> Lifestock-conveyors, railway and ship loading facility on request! <<<